

KEY FEATURES


- Superior high frequency sound reproduction
- Extended frequency response (1 - 23 kHz)
- High sensitivity (92 dB)
- Extremely linear frequency response
- Extremely low distortion
- Designed for high quality studio monitoring and High-End sound systems



TECHNICAL SPECIFICATIONS

Rated impedance	8 Ω
D.C. resistance	4,9 Ω
Power capacity*	40 W _{AES} above 1,2 kHz
Program power	80 W above 1,2 kHz
Sensitivity**	92 dB 1W @ 1m
Frequency range	1 - 23 kHz
Recommended crossover	1,2 kHz or higher (12 dB/oct min)


FREE AIR IMPEDANCE CURVE

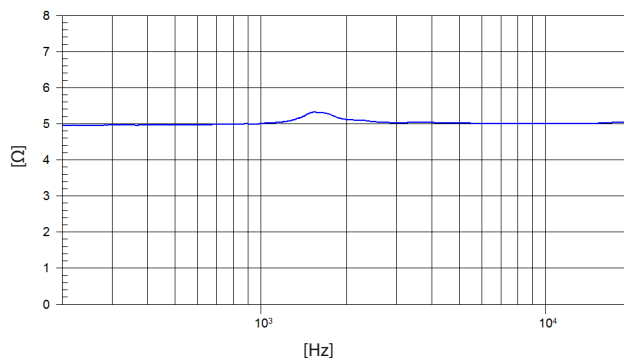

MOUNTING INFORMATION

Overall dimensions	123 x 112 x 35 mm 4,84 x 4,41 x 1,38 in
Cutout dimensions	100 x 100 mm 3,94 x 3,94 in
Mounting	Four M5 holes
Net weight	0,7 kg 1,54 lb
Shipping weight	0,8 kg 1,76 lb

FREQUENCY RESPONSE

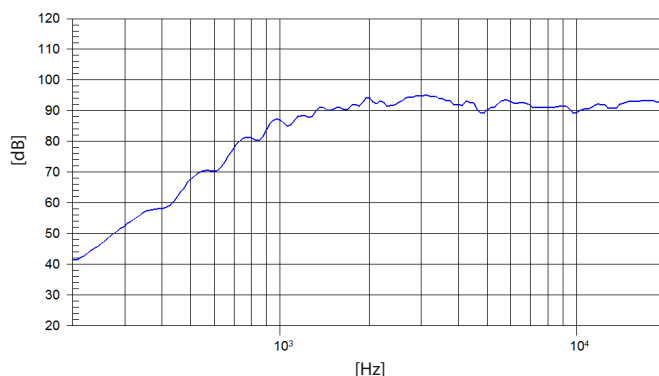

Notes:

* The power capacity is determined according to AES2-1984 (r2003) standard. Program power is defined as the transducer's ability to handle normal music program material.

** Sensitivity was measured at 1m distance, on axis, with 1W input, averaged in the range 1 - 9 kHz.

Note: On axis frequency response measured in anechoic chamber, 1W / 1m