

8NMF

NMF SYSTEM SERIES

8NMF
T-25M




ENCLOSURE RECOMMENDED DESIGN

www.beyma.com

TECHNICAL SPECIFICATIONS


Frequency response (+/-3dB)	55Hz-22KHz
Usable bandwidth (-10dB)	42Hz-30KHz
Sensitivity 1W@1m	90dB
HxV Coverage angle (-6dB)	80°x80°
Transducers LF	8NMF
Transducers HF	T-25M
AES Power Handling	200W
Nominal impedance	8Ω
Connectors	2xNL4
Box dimmensions (*)	235 x 400 x 264 (Birch Plywood 15/9mm)
(*) All dimmensions in millimeters	

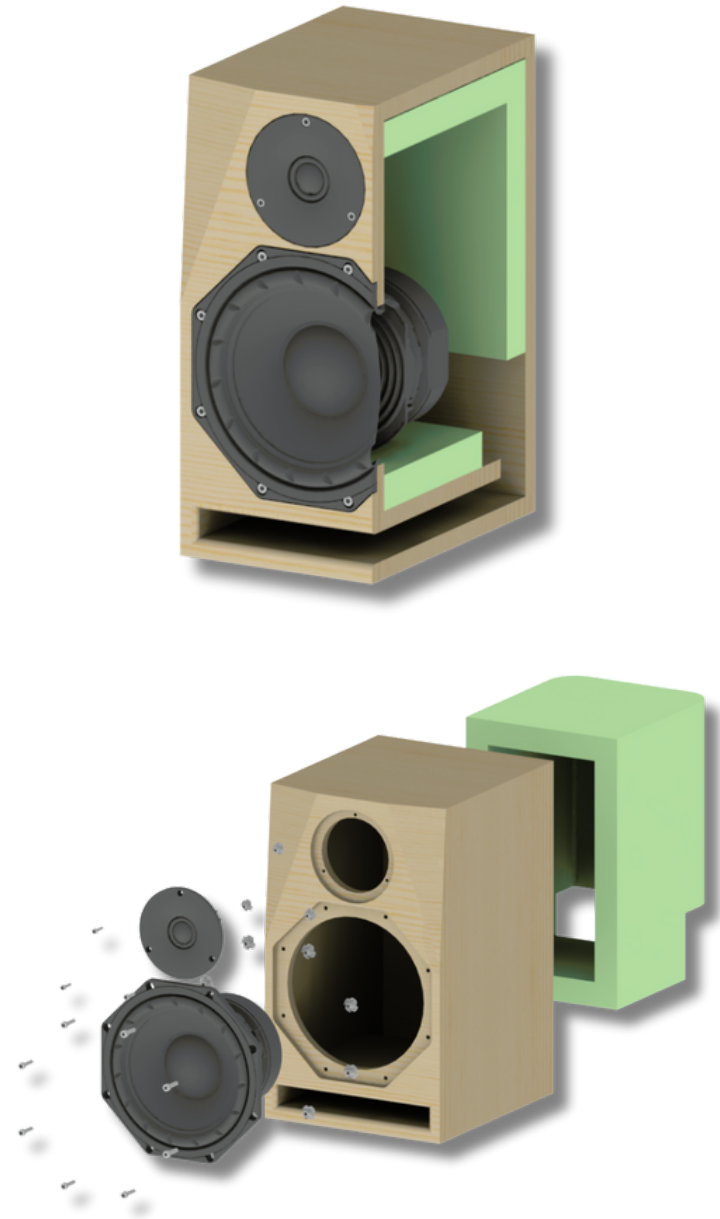


PRESETS

8NMF	f(Hz)	Q	Gain(dB)
-	-	-	-
LIMITER*	Thres (dBu)	Attack (ms)	Release (ms)
PEAK	5.3	16	256
* for 32dB gain amplifier			


FREQUENCY RESPONSE

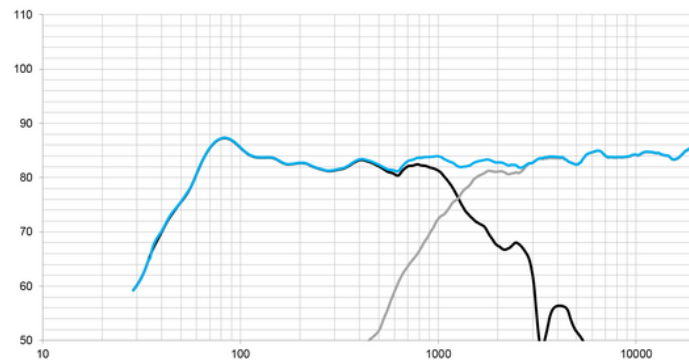


PASSIVE CROSSOVER DESIGN

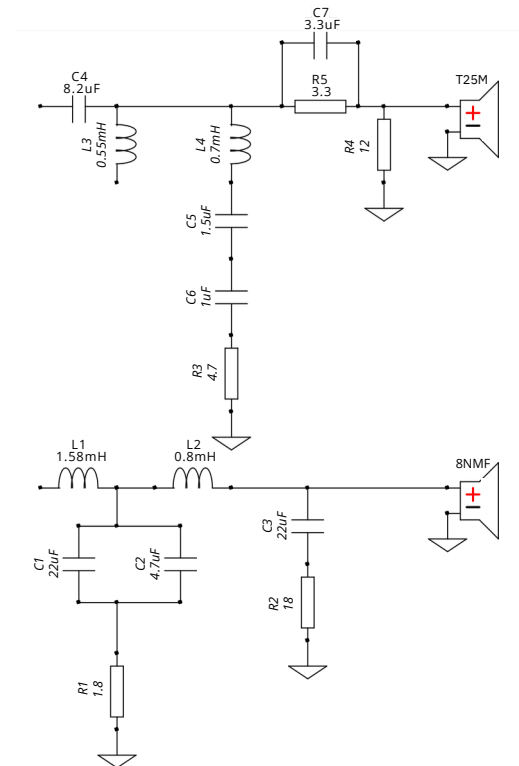


IMPEDANCE

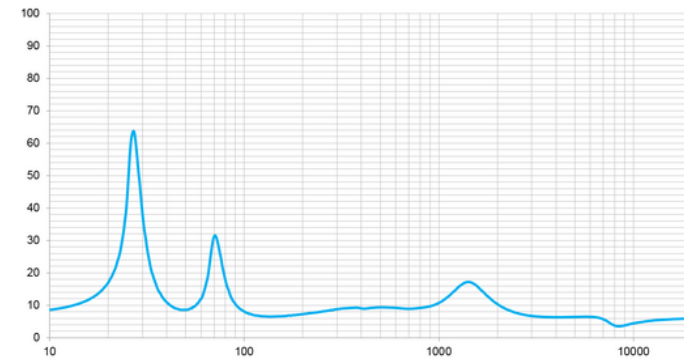

GENERAL VIEW WITH COMPONENTS


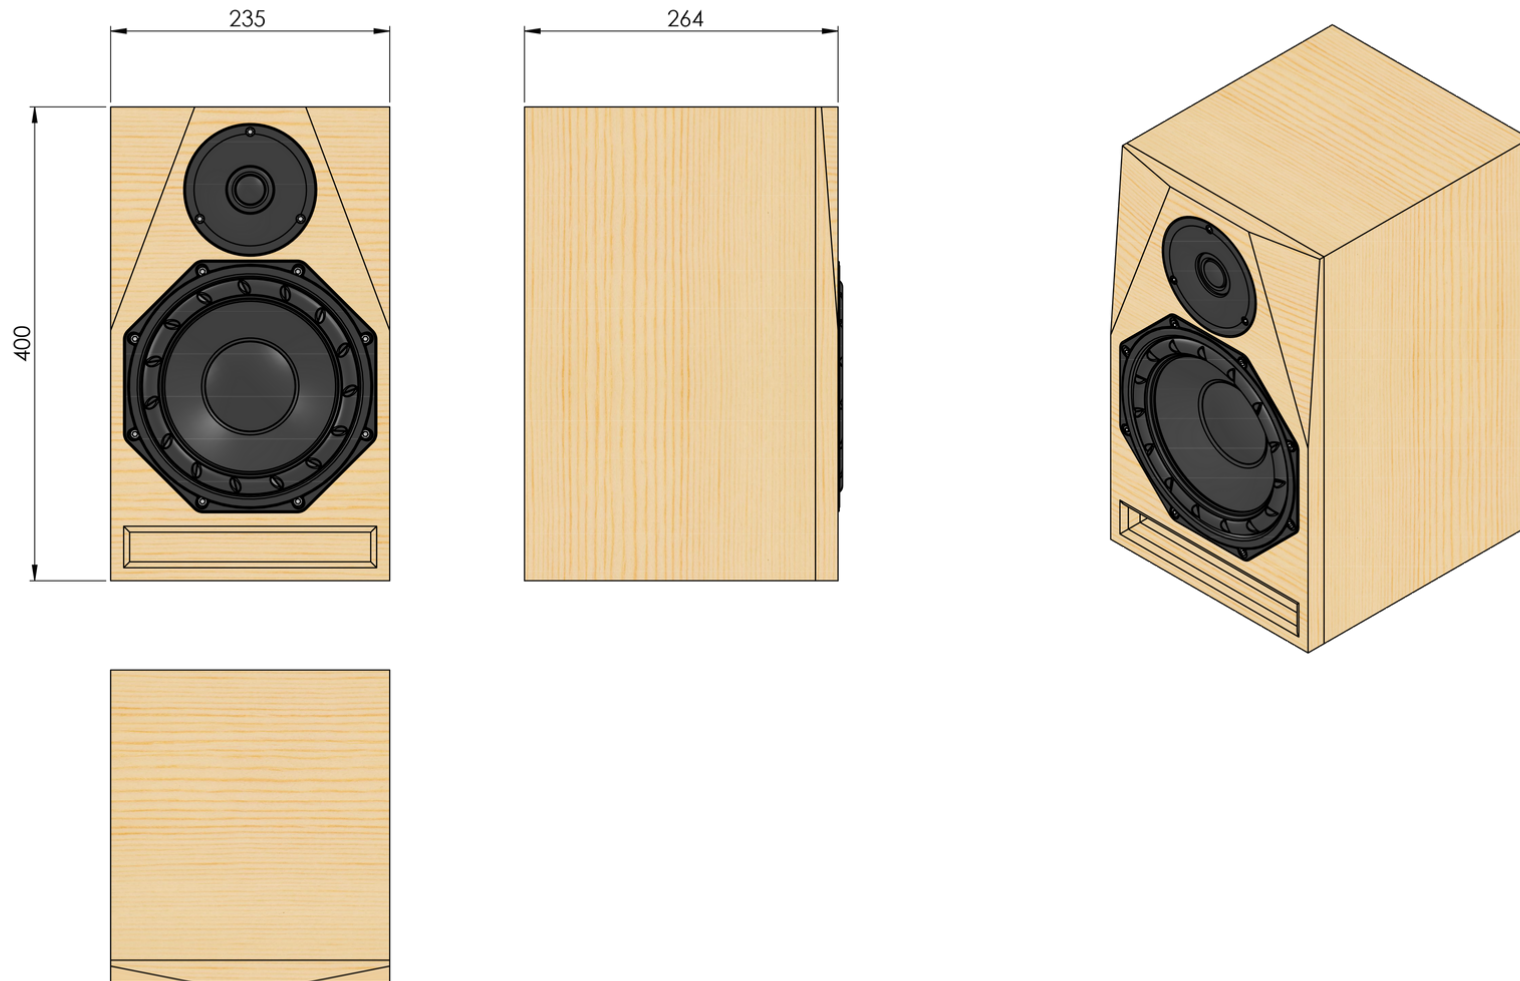


EXPLODED VIEW WITH COMPONENTS


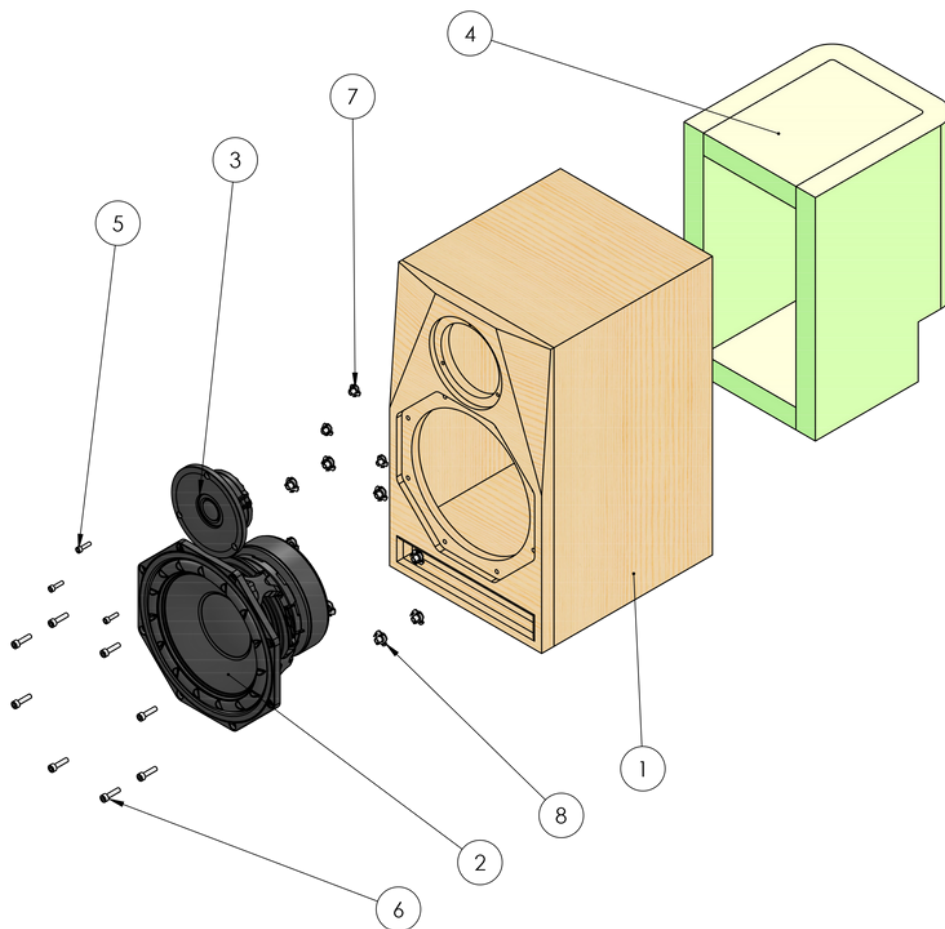


ELEMENT NUMBER	PIECE NUMBER	QUANTITY
1	8NMF	1
2	8NMFW	1
3	T-25M	1
4	DAMPING MATERIAL	1
5	SCREW DIN 912 M4x15	3
6	SCREW DIN 912 M5x20	8
7	NUT DIN1624 - M4	3
8	NUT DIN1624 - M5	8

GENERAL VIEW



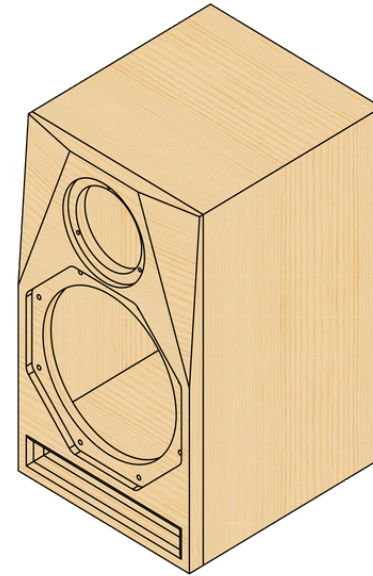
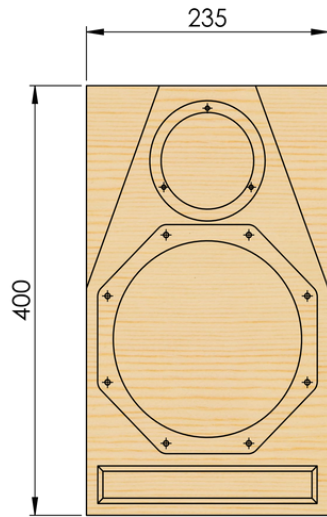


EXPLODED VIEW

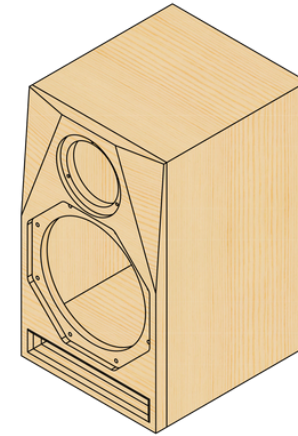
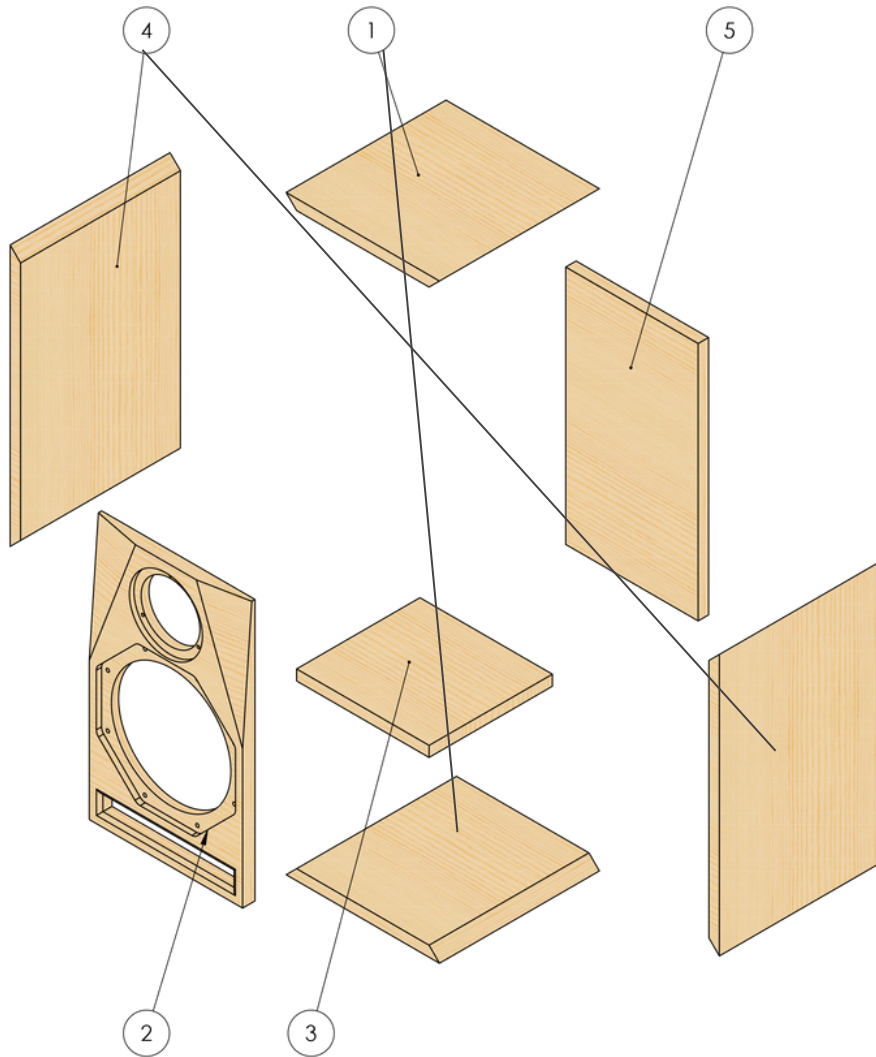


ELEMENT NUMBER	PIECE NUMBER	QUANTITY
1	TOP & BOTTOM PARTS	2
2	FRONT PANEL	1
3	REFLEX	1
4	SIDE	2
5	BACK PANEL	1


TOP & BOTTOM PARTS

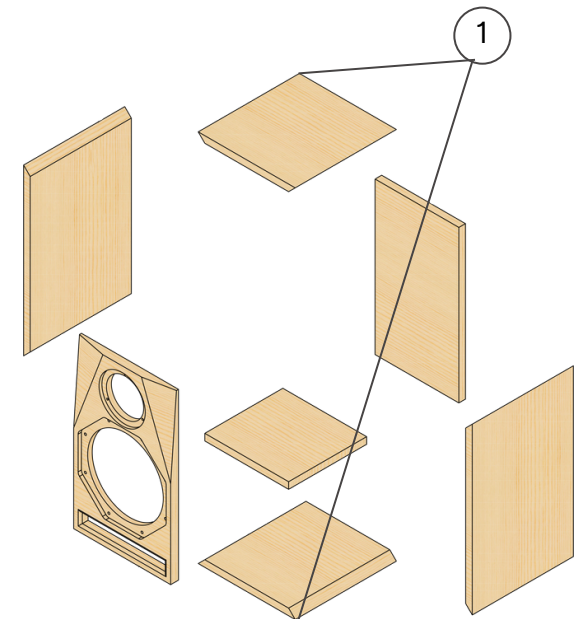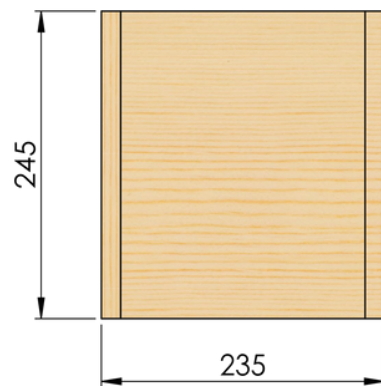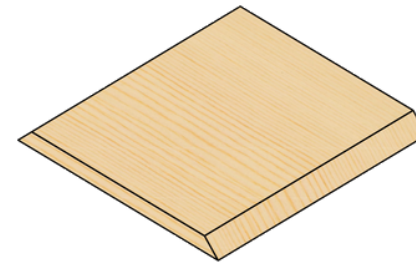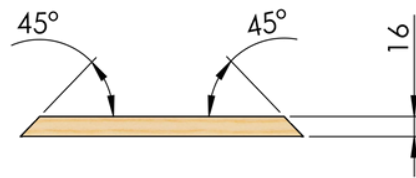




FRONT PANEL

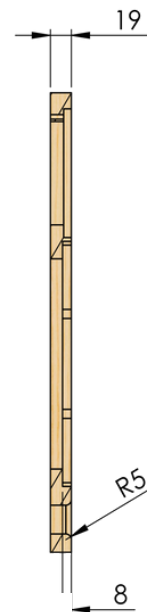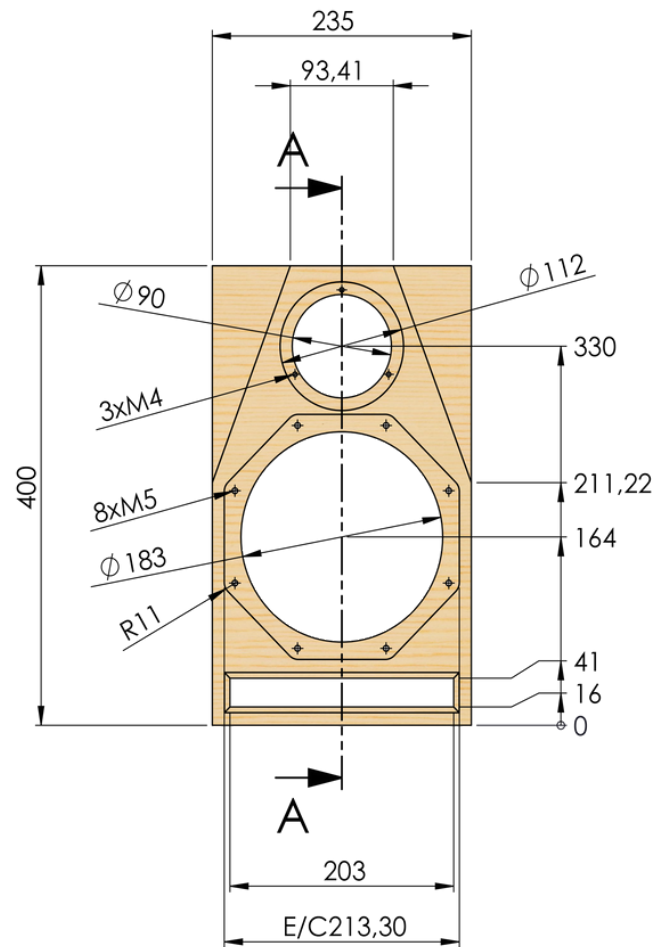





SECTION A-A

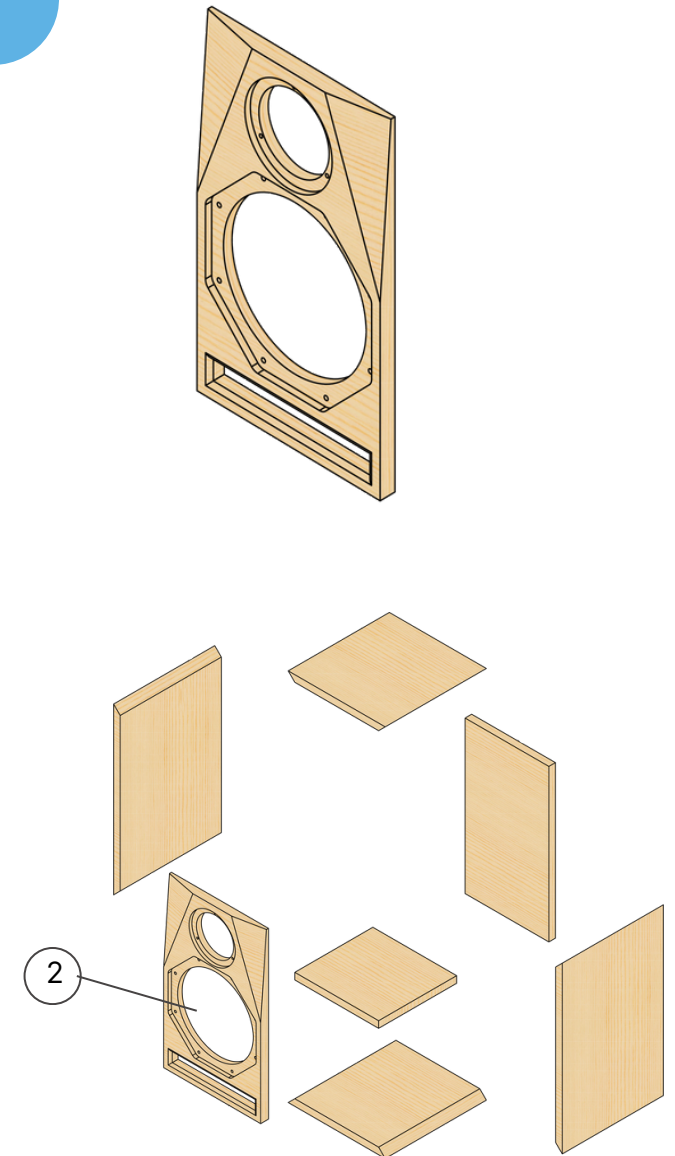

REFLEX

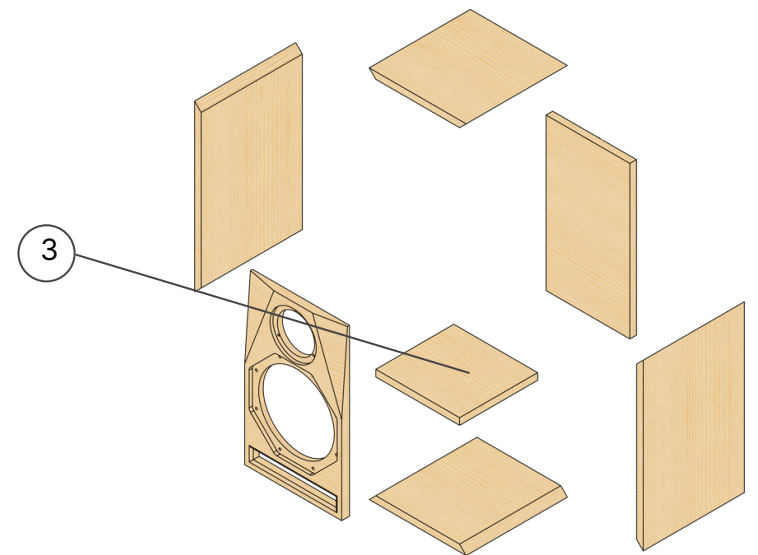
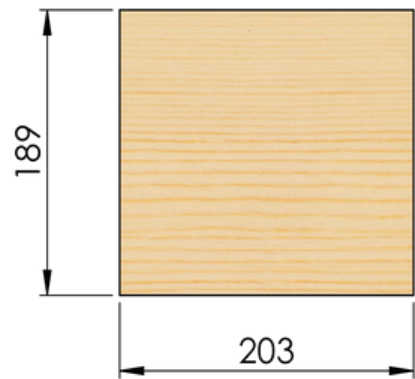
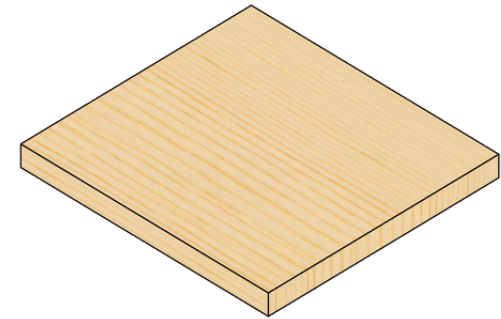



SIDE

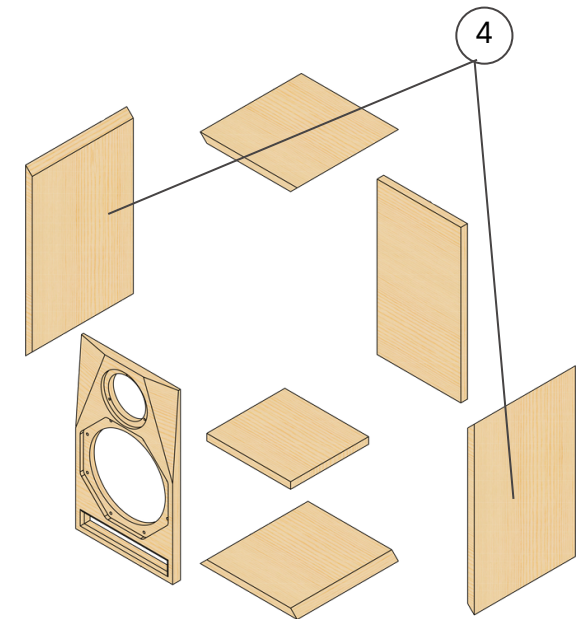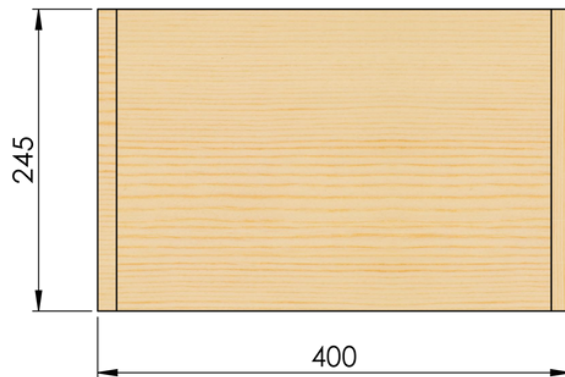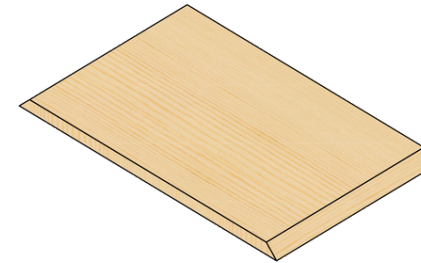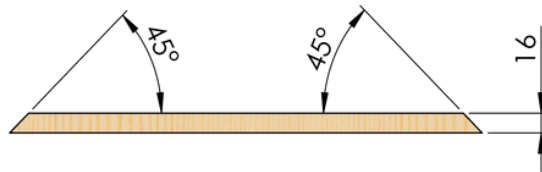



BACK PANEL

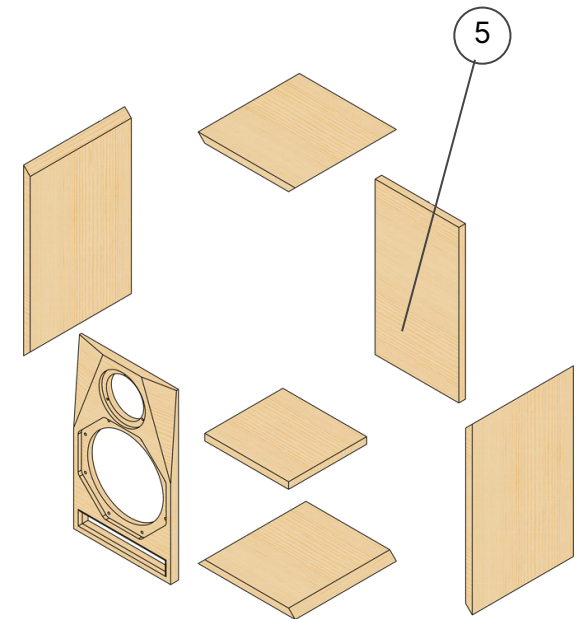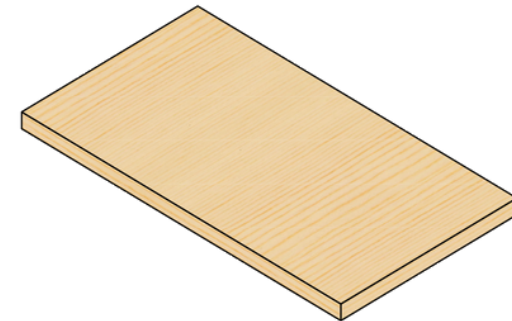

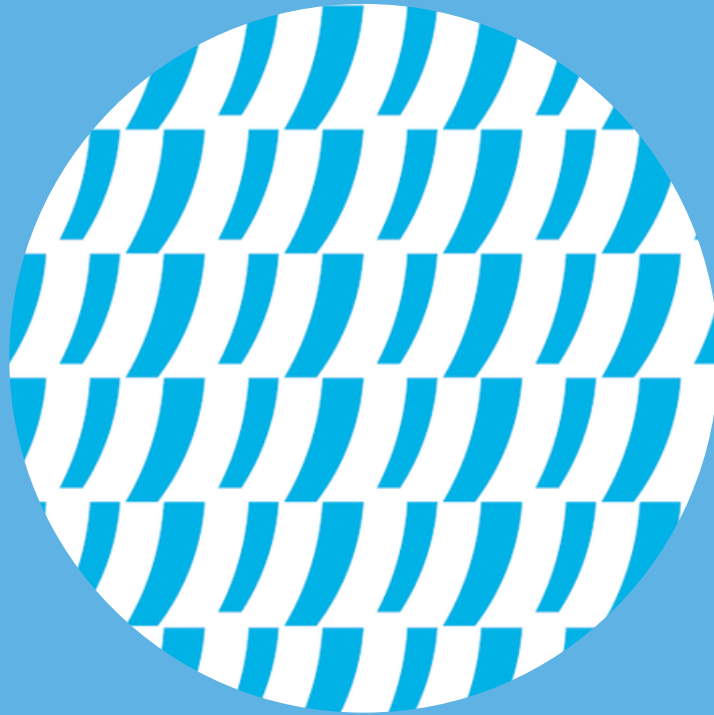

LET'S TALK

www.beyma.com