

FR-12MC HI

FULL RANGE 2 WAY SYSTEM 12"

12MC700ND / 12MCB700
CD314Nd/Fe
TD-365



ENCLOSURE RECOMMENDED DESIGN

www.beyma.com

TECHNICAL SPECIFICATIONS

Frequency response (+/-3dB)	70Hz-18KHz
Usable bandwidth (-10dB)	55Hz-20KHz
Sensitivity 1W@1m	99dB
HxV Coverage angle (-6dB)	60°x50° rotatable
Transducers LF	12MC700ND / 12MCB700
Transducers HF	CD314Nd/Fe
AES Power Handling	700
Nominal impedance	8Ω
Connectors	2xNL4
Box dimensions (*)	340 x 610 x 281.64 (Birch Plywood 15/9mm)
(*) All dimensions in millimeters	




PRESETS


FR-12MC HI	f(Hz)	Q	Gain(dB)
-	125	1,1	8,5
-	270	3,1	4
-	350	1,6	-5
LIMITER*	Thres (dBu)	Attack (ms)	Release (ms)
PEAK	10,7	8	128

* for 32dB gain amplifier
* frequency response graph CD314Nd/Ti with TD365 horn


PASSIVE CROSSOVER DESIGN

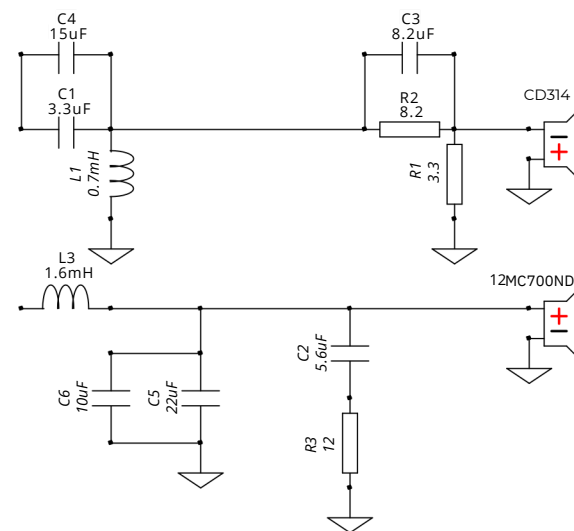

FREQUENCY RESPONSE

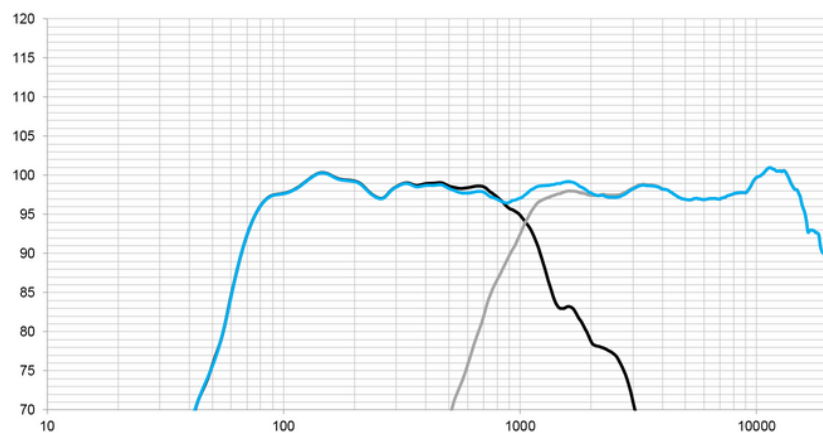


IMPEDANCE

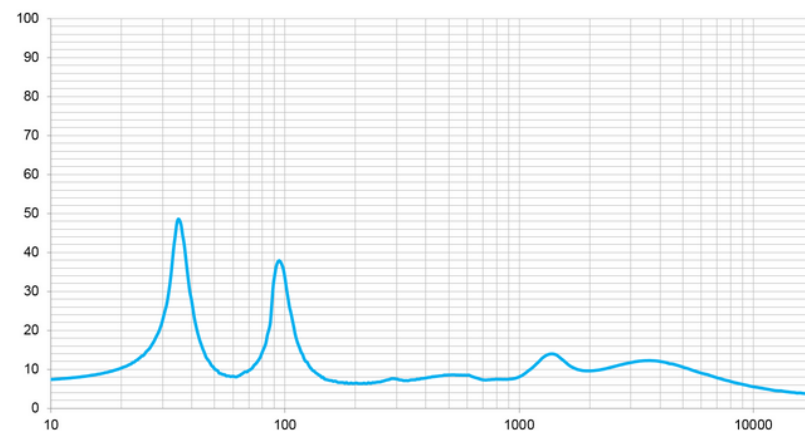




GENERAL VIEW WITH COMPONENTS




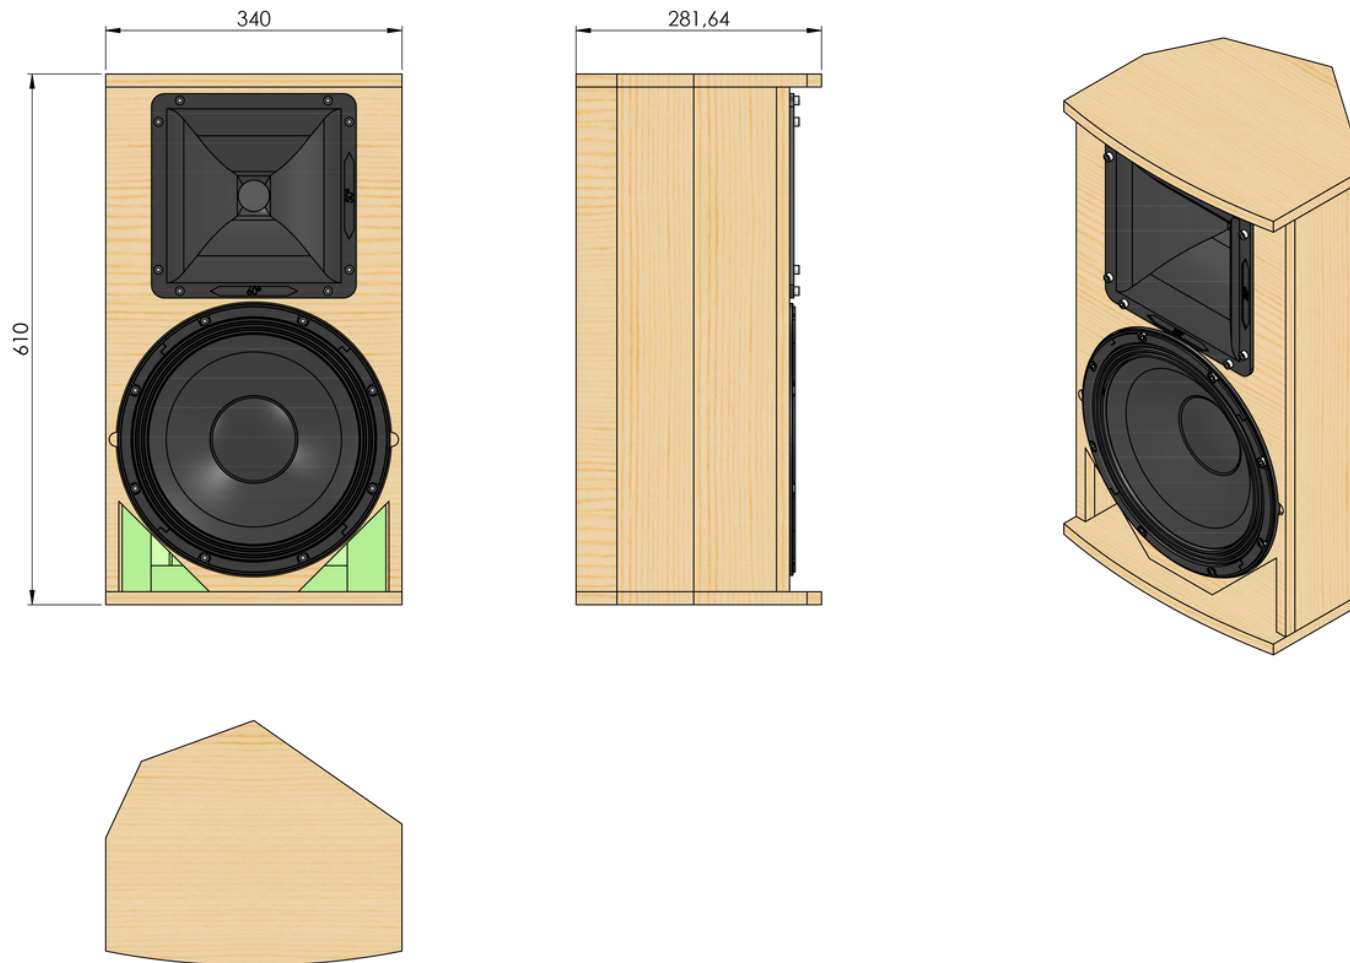


EXPLODED VIEW WITH COMPONENTS


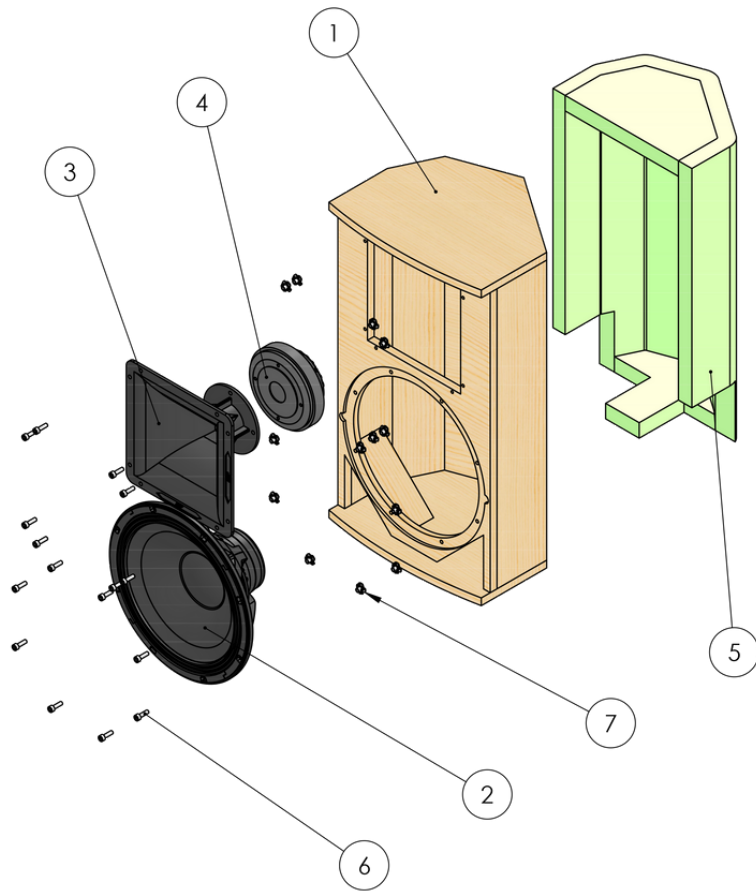


ELEMENT NUMBER	PIECE NUMBER	QUANTITY
1	FR-12MC HI	1
2	12MC700ND-12MCB700	1
3	TD-365	1
4	CD-314Nd/Fe	1
5	FR-12MC HI DAMPING MATERIAL	1
6	SCREW DIN 912 M6x20	16
7	NUT DIN1624 - M6	16

GENERAL VIEW

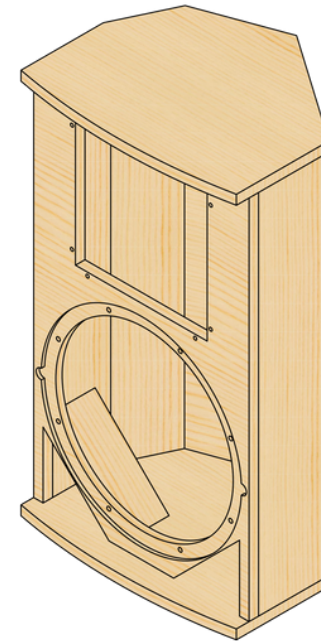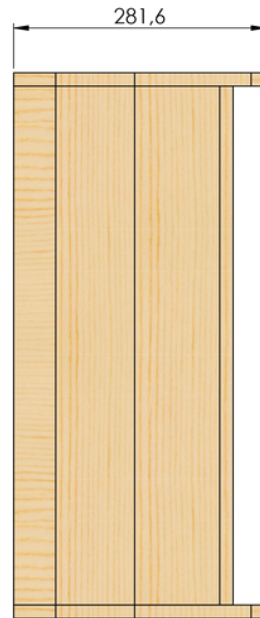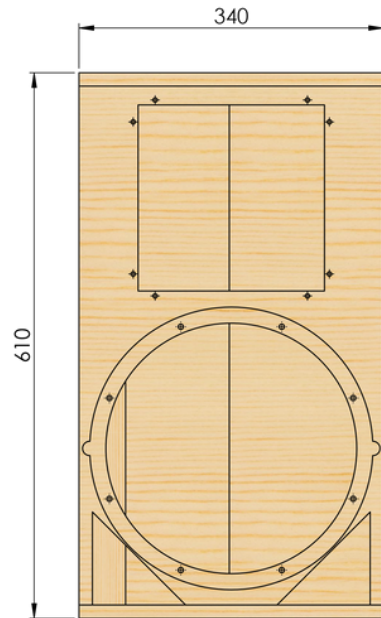






EXPLODED VIEW

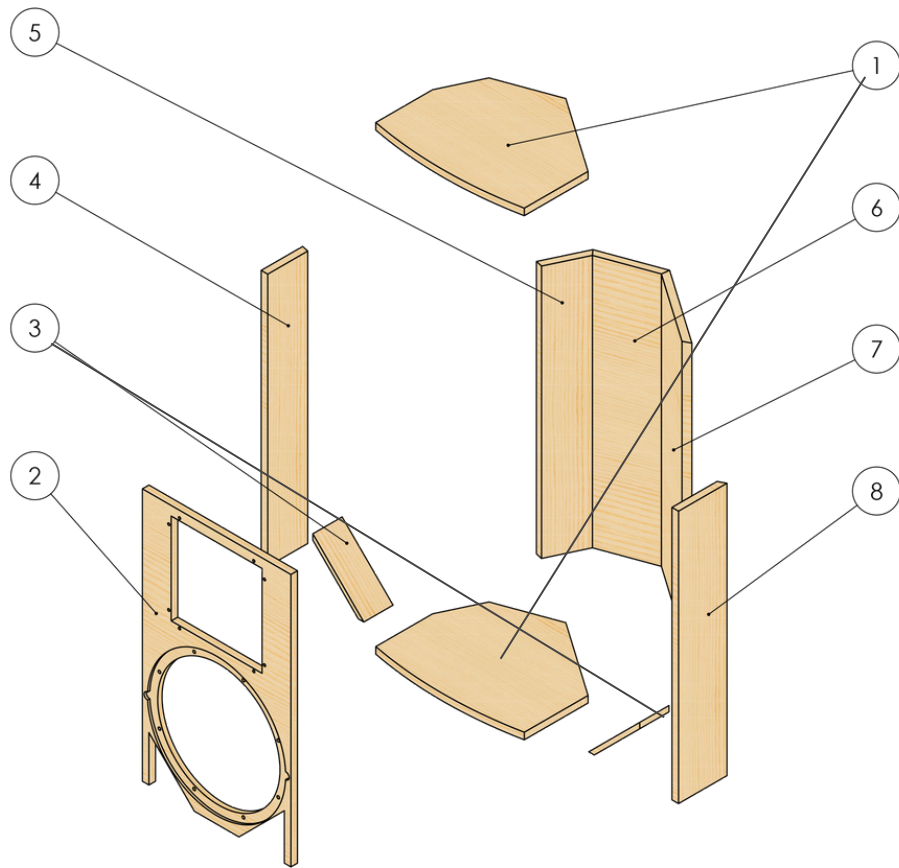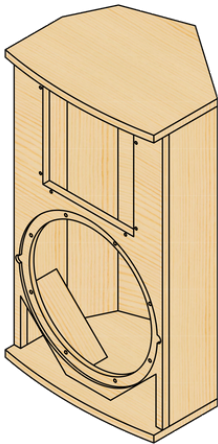

ELEMENT NUMBER	PIECE NUMBER	QUANTITY
1	TOP & BOTTOM PARTS	2
2	FRONT PANEL	1
3	REFLEX	2
4	SIDE_1	1
5	SIDE_2	1
6	SIDE_3	1
7	SIDE_4	1
8	SIDE_5	1






TOP & BOTTOM PARTS

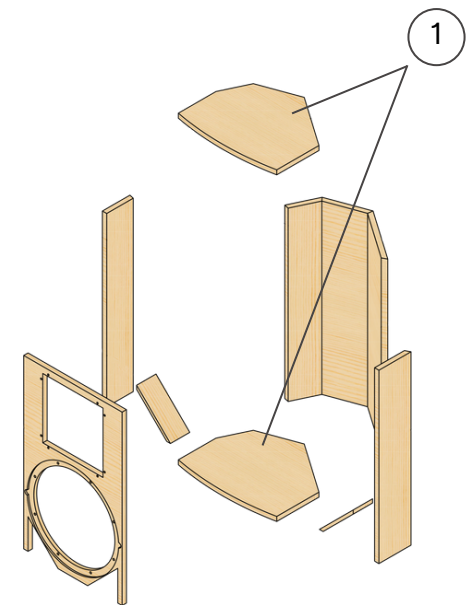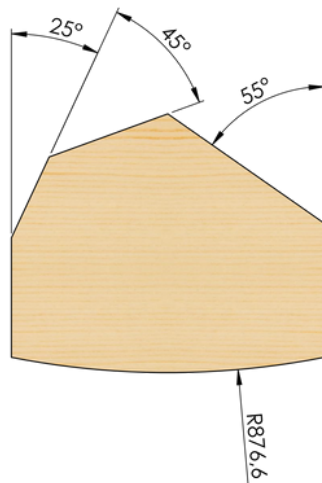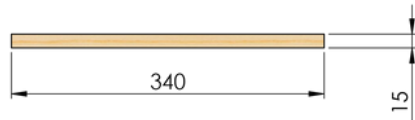

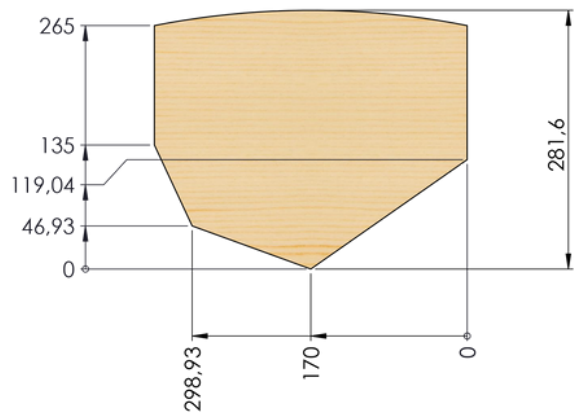




FRONT PANEL

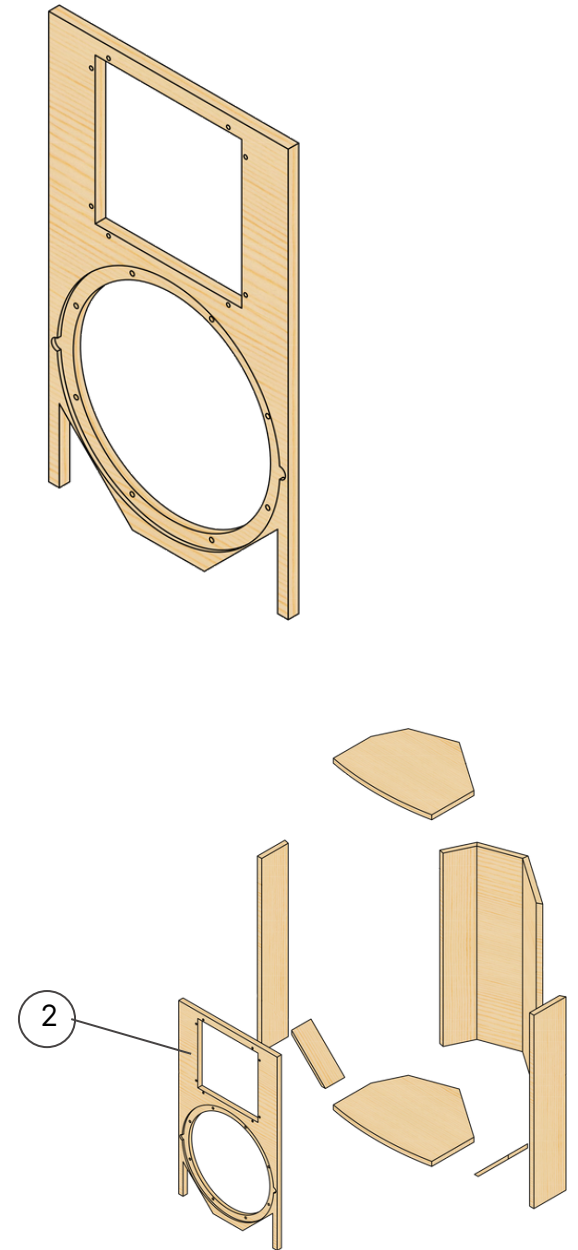
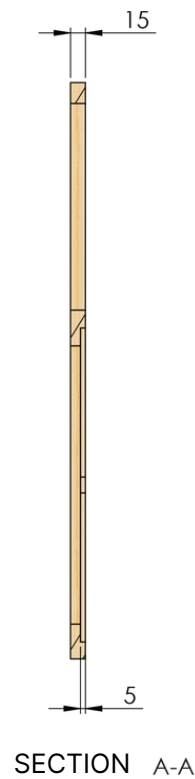
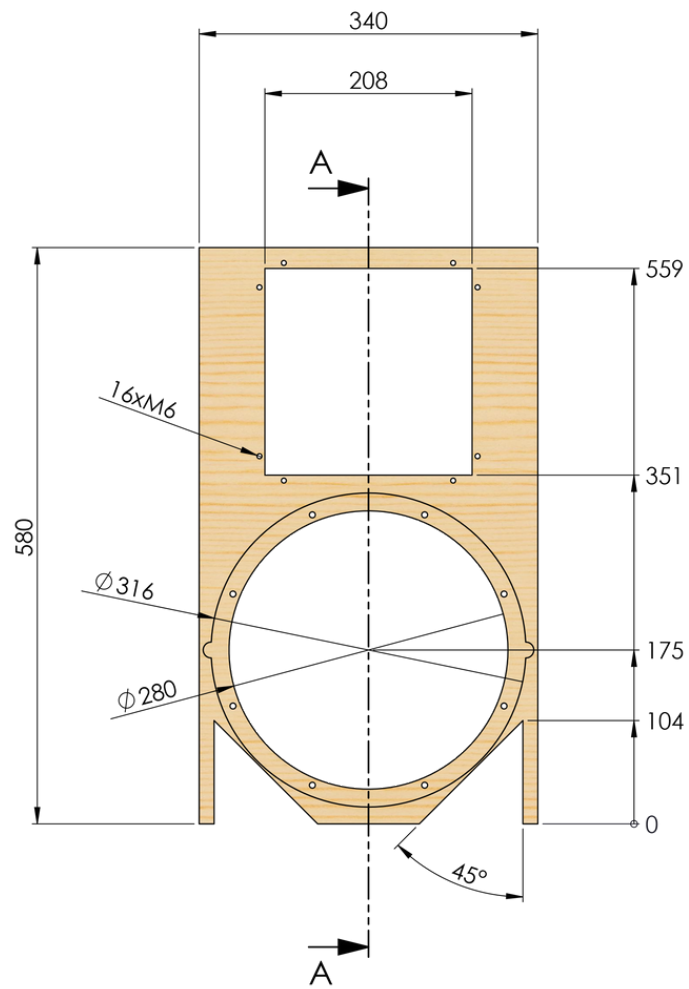


REFLEX

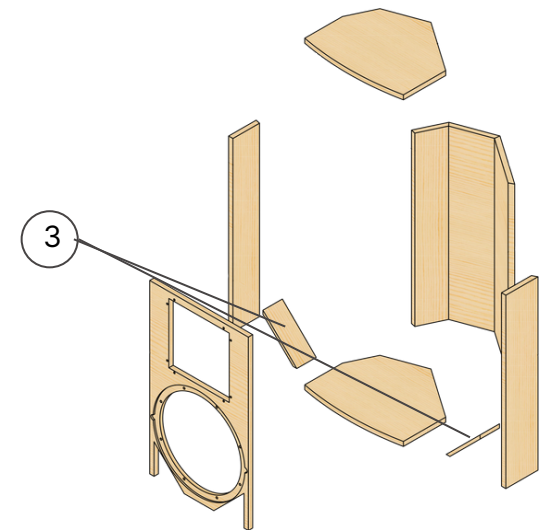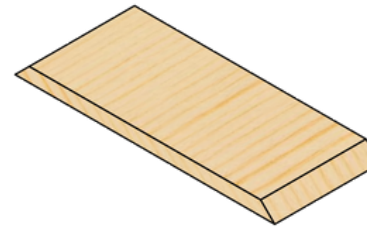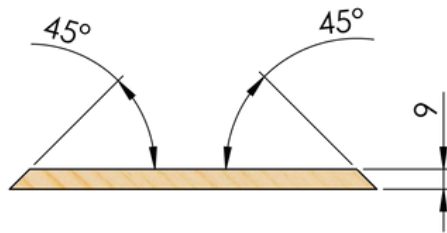






SIDE 1

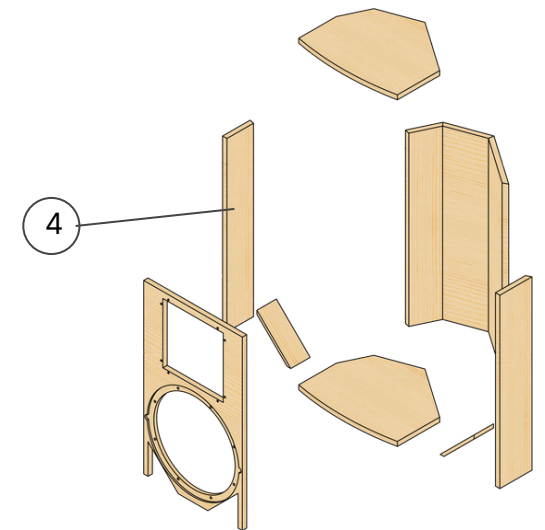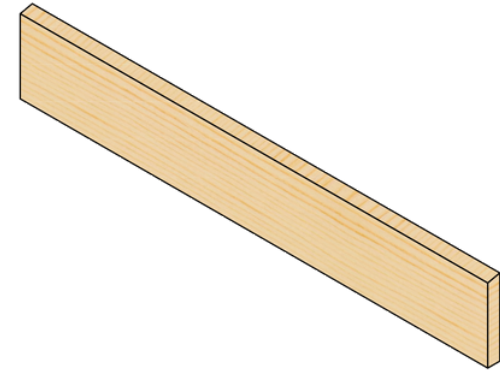






SIDE 2

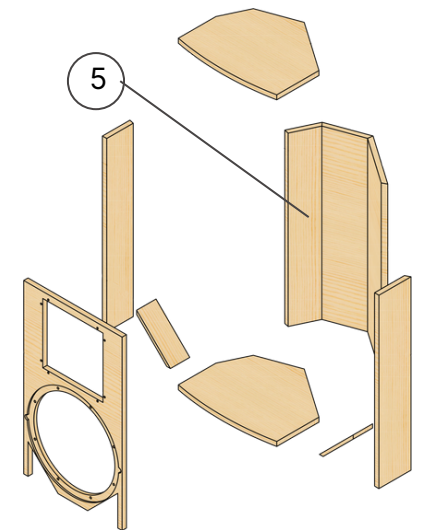
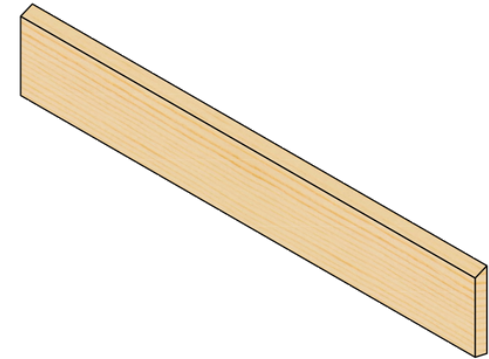
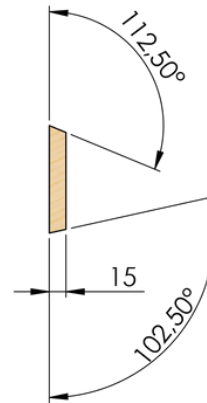








SIDE 3

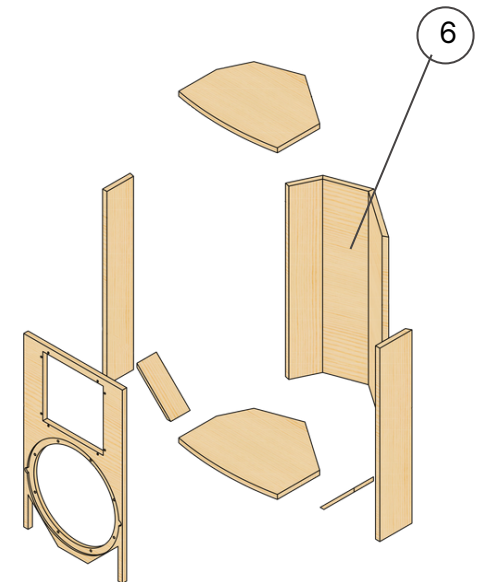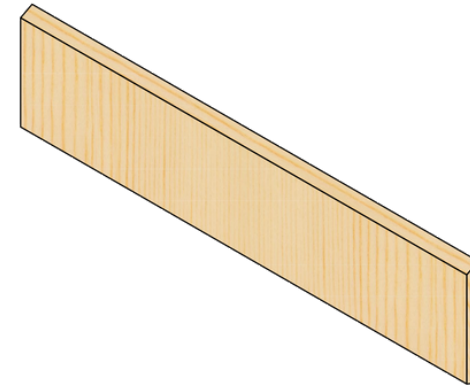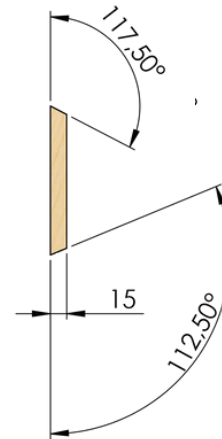


SIDE 4

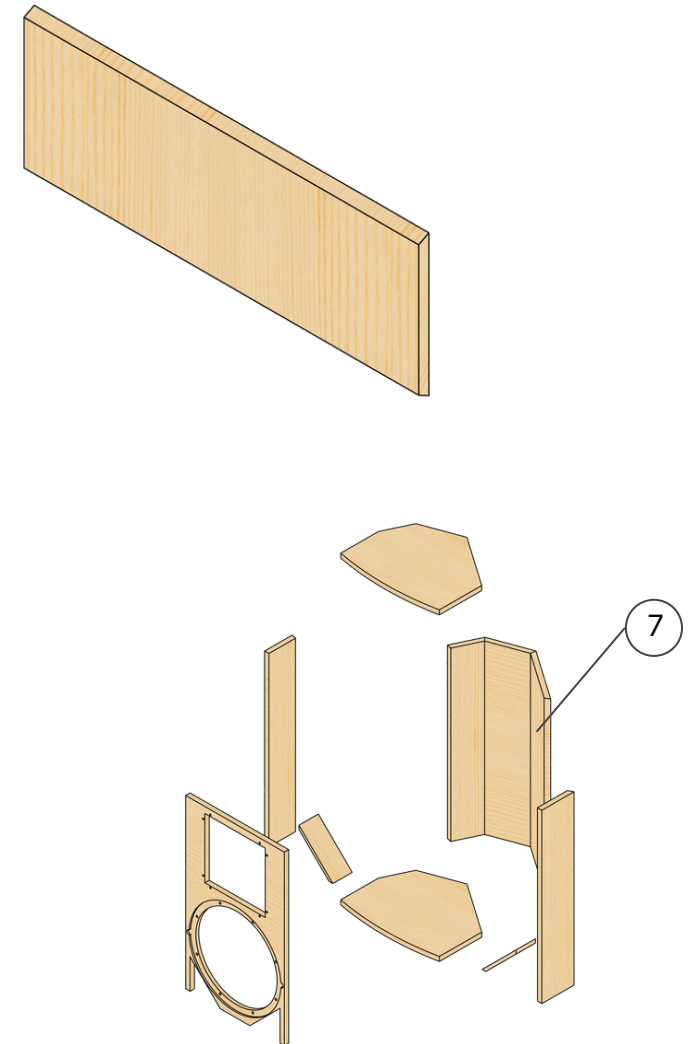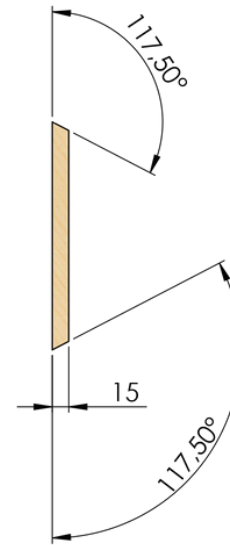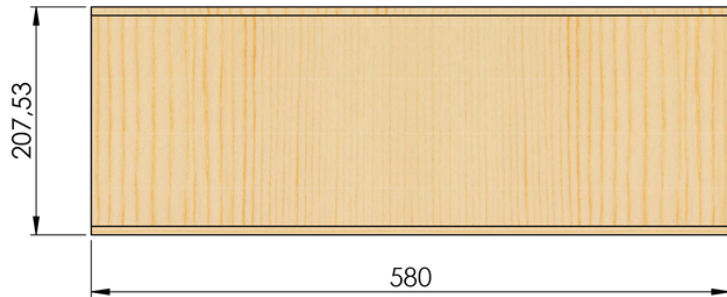

SIDE 5

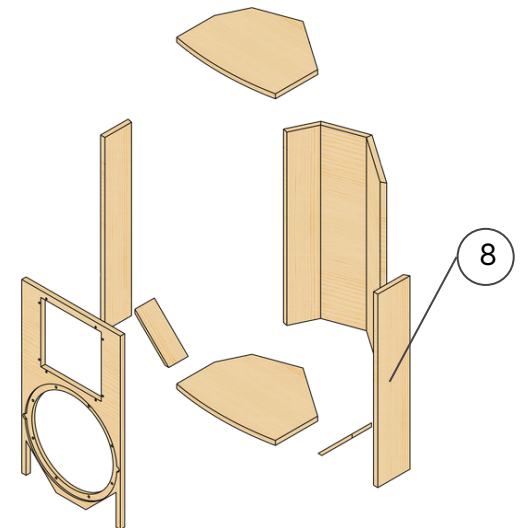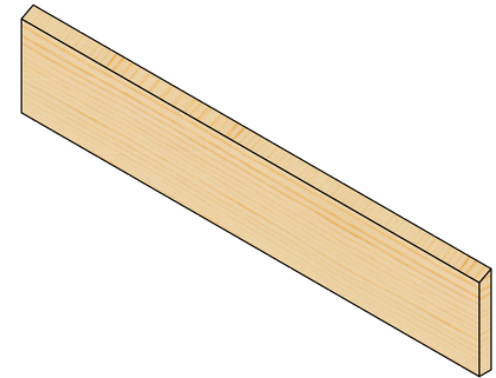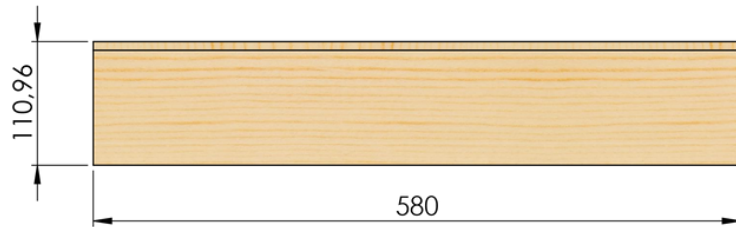

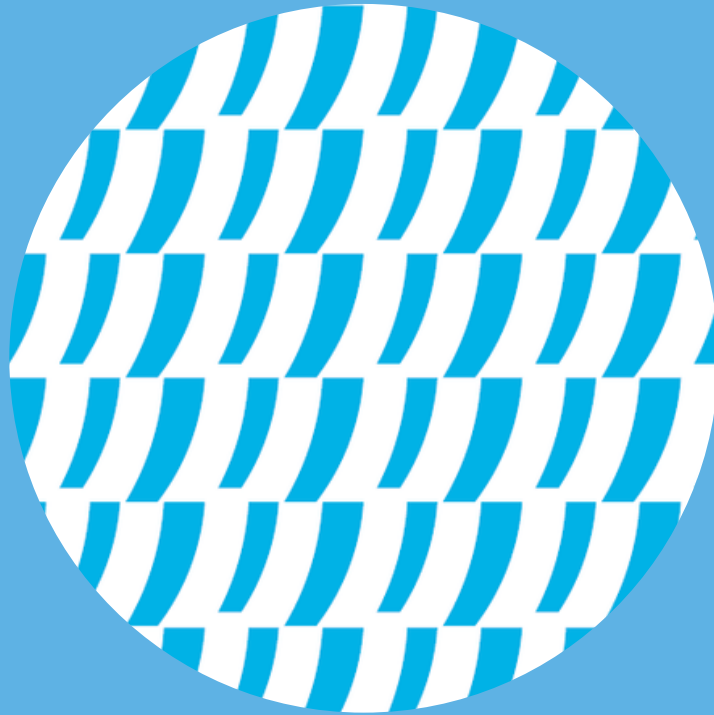

LET'S TALK

www.beyma.com